

PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

M63807P/FP/KP

8-UNIT 300mA TRANSISTOR ARRAY

DESCRIPTION

M63807P/FP/KP are eight-circuit Single transistor arrays. The circuits are made of NPN transistors. Both the semiconductor integrated circuits perform high-current driving with extremely low input-current supply.

FEATURES


- Three package configurations (P, FP, and KP)
- Medium breakdown voltage ($BV_{CEO} \geq 35V$)
- Synchronizing current ($I_c(\max) = 300mA$)
- Low output saturation voltage
- Wide operating temperature range ($T_a = -40$ to $+85^{\circ}C$)

APPLICATION


Driving of digit drives of indication elements (LEDs and lamps) with small signals

FUNCTION


The M63807P/FP/KP each have eight circuits consisting of NPN transistor. The transistor emitters are all connected to the GND pin. The transistors allow synchronous flow of 300mA collector current. A maximum of 35V voltage can be applied between the collector and emitter.

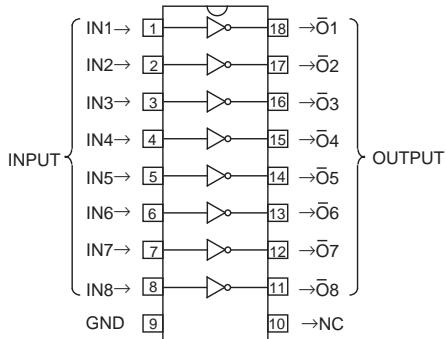PIN CONFIGURATION

Package type 18P4G(P)

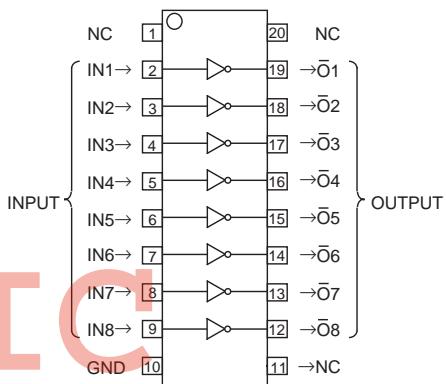

NC : No connection

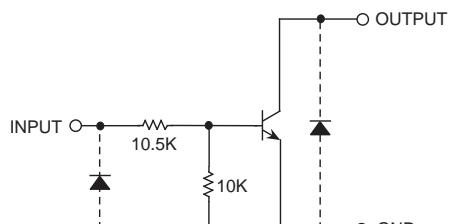20P2N-A(FP)
Package type 20P2E-A(KP)**CIRCUIT DIAGRAM**

The eight circuits share the GND.

The diode, indicated with the dotted line, is parasitic, and cannot be used.

Unit: Ω

PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

M63807P/FP/KP

8-UNIT 300mA TRANSISTOR ARRAY

ABSOLUTE MAXIMUM RATINGS (Unless otherwise noted, $T_a = -40 \sim +85^\circ\text{C}$)

| Symbol | Parameter | Conditions | Ratings | Unit |
|------------------|---------------------------|----------------------------------|------------|------|
| V _{CEO} | Collector-emitter voltage | Output, H | -0.5 ~ +35 | V |
| I _c | Collector current | Current per circuit output, L | 300 | mA |
| V _I | Input voltage | | -0.5 ~ +35 | V |
| P _d | Power dissipation | Ta = 25°C, when mounted on board | M63807P | 1.79 |
| | | | M63807FP | 1.10 |
| | | | M63807KP | 0.68 |
| T _{opr} | Operating temperature | | -40 ~ +85 | °C |
| T _{stg} | Storage temperature | | -55 ~ +125 | °C |

RECOMMENDED OPERATING CONDITIONS (Unless otherwise noted, $T_a = -40 \sim +85^\circ\text{C}$)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|-----------------|---|-----------------|------------------------------|-----|-----|------|
| | | | min | typ | max | |
| V _O | Output voltage | | 0 | — | 35 | V |
| I _c | Collector current (Current per 1 circuit when 8 circuits are coming on simultaneously) | M63807P | Duty Cycle no more than 50% | 0 | — | 250 |
| | | | Duty Cycle no more than 100% | 0 | — | 170 |
| | | M63807FP | Duty Cycle no more than 30% | 0 | — | 250 |
| | | | Duty Cycle no more than 100% | 0 | — | 130 |
| | | M63807KP | Duty Cycle no more than 12% | 0 | — | 250 |
| | | | Duty Cycle no more than 100% | 0 | — | 100 |
| V _{IN} | Input voltage | | 0 | — | 30 | V |

ELECTRICAL CHARACTERISTICS (Unless otherwise noted, $T_a = 25^\circ\text{C}$)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|----------------------|--------------------------------------|---|--------|------|------|------|
| | | | min | typ | max | |
| V (BR) CEO | Collector-emitter breakdown voltage | I _{CEO} = 10μA | 35 | — | — | V |
| V _{CE(sat)} | Collector-emitter saturation voltage | I _{IN} = 1mA, I _c = 10mA | — | — | 0.2 | V |
| | | I _{IN} = 2mA, I _c = 150mA | — | — | 0.8 | |
| V _{IN(on)} | "On" input voltage | I _{IN} = 1mA, I _c = 10mA | 7.5 | 11.0 | 15.0 | V |
| h _{FE} | DC amplification factor | V _{CE} = 10V, I _c = 10mA | 50 | — | — | — |

SWITCHING CHARACTERISTICS (Unless otherwise noted, $T_a = 25^\circ\text{C}$)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------------|---------------|--------------------|--------|-----|-----|------|
| | | | min | typ | max | |
| t _{on} | Turn-on time | CL = 15pF (note 1) | — | 120 | — | ns |
| t _{off} | Turn-off time | | — | 240 | — | ns |


PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

M63807P/FP/KP


8-UNIT 300mA TRANSISTOR ARRAY

NOTE 1 TEST CIRCUIT




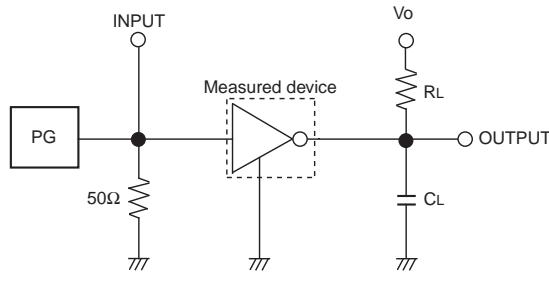


- (1) Pulse generator (PG) characteristics : PRR = 1kHz, $t_w = 10\mu s$, $t_r = 6ns$, $t_f = 6ns$, $Z_0 = 50\Omega$, $V_{IH} = 11V$
- (2) Input-output conditions : $R_L = 220\Omega$, $V_o = 35V$
- (3) Electrostatic capacity C_L includes floating capacitance at connections and input capacitance at probes

TIMING DIAGRAM

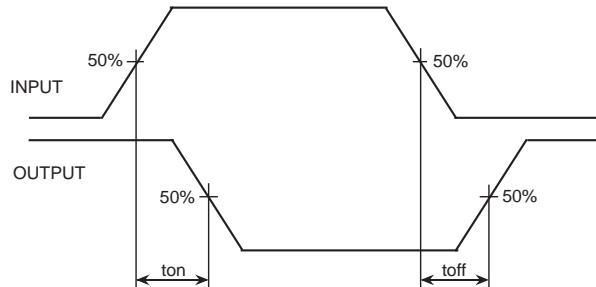

TYPICAL CHARACTERISTICS



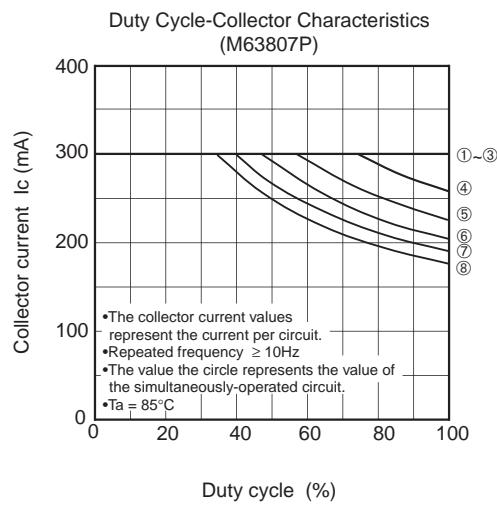
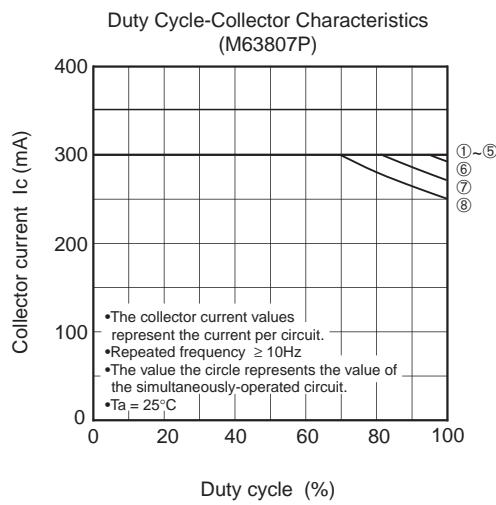
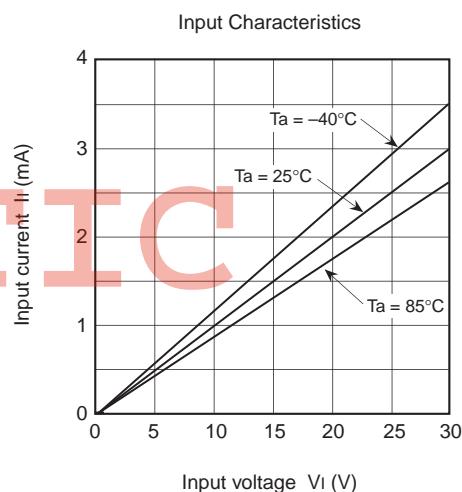
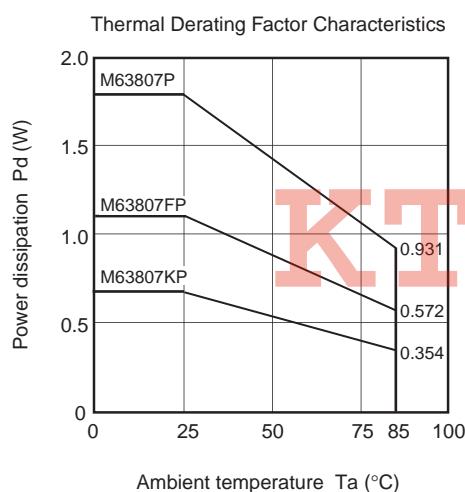


PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

M63807P/FP/KP

8-UNIT 300mA TRANSISTOR ARRAY

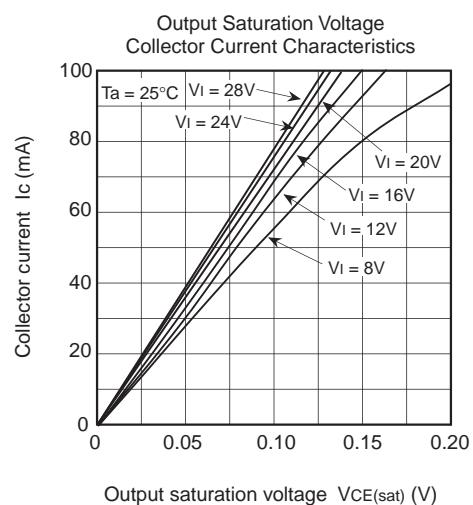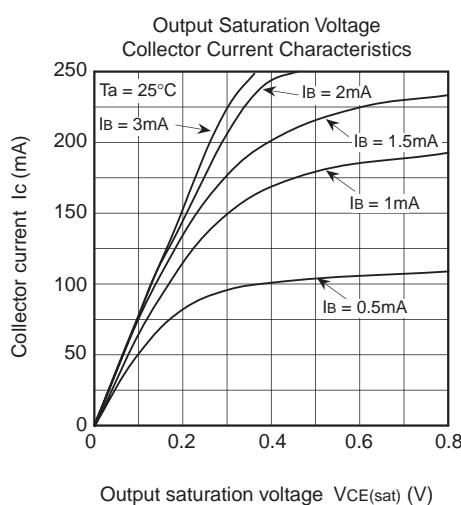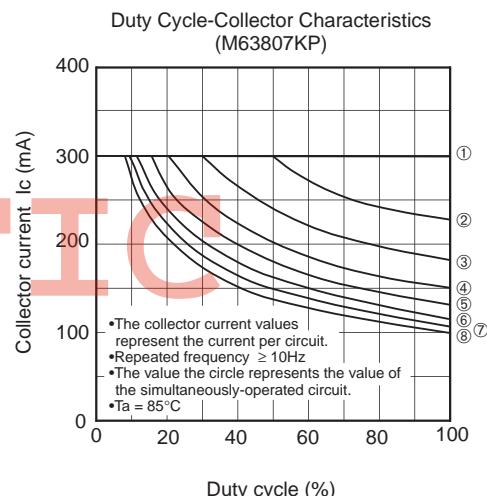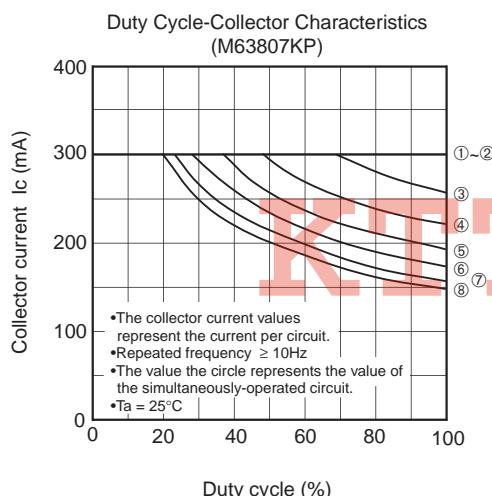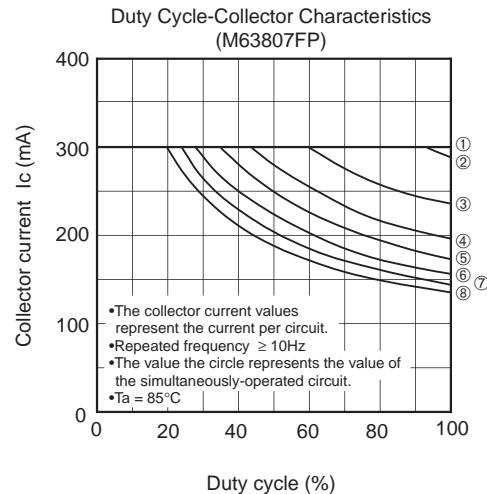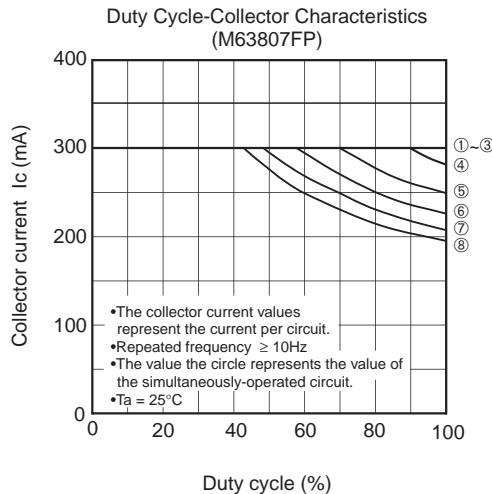

PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

M63807P/FP/KP

8-UNIT 300mA TRANSISTOR ARRAY

