




F2D SERIES

◆FEATURES

- Small and light.
- Thin coating makes it suitable for automatic insertion.
- RoHS compliance.

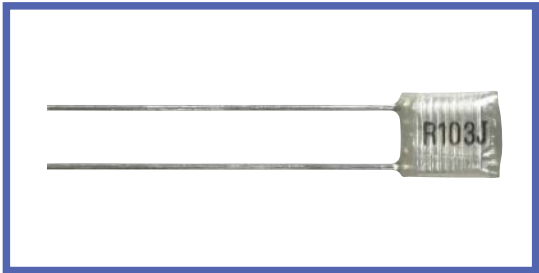


◆SPECIFICATIONS

Category temperature	$-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$ (Derate the voltage as shown in the Fig2 at P233 when using the capacitor beyond 85°C .)
Rated voltage (U_R)	50VDC, 100VDC, 200VDC
Capacitance tolerance	$\pm 5\%(\text{J}), \pm 10\%(\text{K})$
$\tan\delta$	0.01max at 1kHz
Voltage proof	$U_R\times 200\%$ 60s
Insulation resistance	30000M Ω min
Reference standard	JIS C 5101-11, JIS C 5101-1

◆OUTLINE

(mm)

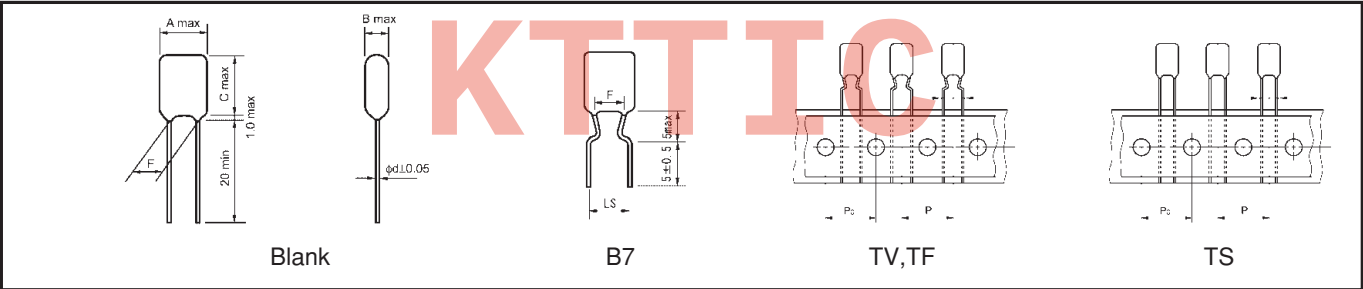

◆PART NUMBER

□□□ Rated Voltage	F2D Series	□□□ Rated capacitance	□ Tolerance	□□□ Sub mark	□□ Suffix
---	----------------------------------	---	-----------------------------------	------------------------------------	---------------------------------

Rubycon**POLYESTER FILM CAPACITORS****F2D**

◆ STANDARD SIZE

□ : Tolerance ** : Suffix

RATED VOLTAGE	cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)							Part No.
								Long Lead type		Taping Ammo pack type - style					
		A	B	C	F±1.0	LS±0.5	d	Bag	Carton	TV	TF	—	—	TS	
50 VDC	0.00047	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D471□**
	0.00056	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D561□**
	0.00068	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D681□**
	0.00082	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D821□**
	0.001	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D102□**
	0.0012	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D122□**
	0.0015	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D152□**
	0.0018	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D182□**
	0.0022	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D222□**
	0.0027	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D272□**
	0.0033	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D332□**
	0.0039	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D392□**
	0.0047	6.0	3.5	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D472□**
	0.0056	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D562□**
	0.0068	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D682□**
	0.0082	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	50F2D822□**
	0.01	6.0	3.5	7.5	3.5±0.5	5.0	0.5	200	8,000	2,500	—	—	—	2,500	50F2D103□**
	0.012	6.0	3.0	8.5	3.5±0.5	5.0	0.5	200	8,000	2,500	—	—	—	2,500	50F2D123□**
	0.015	6.0	3.0	8.5	3.5±0.5	5.0	0.5	200	8,000	2,500	—	—	—	2,500	50F2D153□**
	0.018	6.0	3.0	8.5	3.5±0.5	5.0	0.5	200	8,000	2,500	—	—	—	2,500	50F2D183□**
	0.022	7.0	4.0	9.0	3.5±0.5	5.0	0.5	200	8,000	2,500	—	—	—	2,500	50F2D223□**
	0.027	7.0	4.0	9.0	3.5±0.5	5.0	0.5	200	5,000	2,500	—	—	—	2,500	50F2D273□**
	0.033	7.0	4.0	9.0	3.5±0.5	5.0	0.5	200	5,000	2,000	—	—	—	2,500	50F2D333□**
	0.039	7.5	4.0	9.0	5.0±0.5	5.0	0.5	200	5,000	2,000	—	—	—	2,000	50F2D393□**
	0.047	8.0	4.5	9.5	5.0±0.5	5.0	0.5	200	4,000	2,000	—	—	—	2,000	50F2D473□**
	0.056	8.0	4.0	10.5	5.0±0.5	5.0	0.5	200	4,000	2,000	—	—	—	2,000	50F2D563□**
	0.068	8.0	4.5	10.5	5.0±0.5	5.0	0.5	200	4,000	1,500	—	—	—	1,500	50F2D683□**
	0.082	8.0	4.5	10.5	5.0±0.5	5.0	0.5	200	3,000	1,500	—	—	—	1,500	50F2D823□**
	0.1	8.5	5.5	11.0	5.0±0.5	5.0	0.5	200	3,000	1,500	—	—	—	1,500	50F2D104□**
	0.12	8.5	5.5	12.0	5.0±0.5	5.0	0.5	200	3,000	1,500	—	—	—	1,500	50F2D124□**
	0.15	9.5	6.0	12.0	5.0±0.5	5.0	0.5	200	2,000	1,000	—	—	—	1,000	50F2D154□**
	0.18	10.0	6.5	12.0	7.5±0.5	5.0	0.5	200	2,000	1,000	—	—	—	1,000	50F2D184□**
	0.22	11.0	7.0	12.0	7.5±0.5	5.0	0.5	200	2,000	1,000	—	—	—	1,000	50F2D224□**
	0.27	11.0	6.5	14.0	7.5±0.5	5.0	0.6	200	2,000	—	1,000	—	—	—	50F2D274□**
	0.33	12.0	7.0	14.5	7.5±0.5	5.0	0.6	100	1,500	—	1,000	—	—	—	50F2D334□**
	0.39	12.5	7.5	14.5	7.5±0.5	5.0	0.6	100	1,000	—	500	—	—	—	50F2D394□**
	0.47	13.5	8.5	15.5	7.5±0.5	5.0	0.6	100	1,000	—	500	—	—	—	50F2D474□**



◆ STANDARD SIZE

□ : Tolerance ** : Suffix

RATED VOLTAGE	cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)							Part No.
								Long Lead type		Taping Ammo pack type - style					
		A	B	C	F±1.0	LS±0.5	d	Bag	Carton	TV	TF	—	—	TS	
100 VDC	0.00047	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D471□**
	0.00056	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D561□**
	0.00068	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D681□**
	0.00082	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D821□**
	0.001	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D102□**
	0.0012	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D122□**
	0.0015	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D152□**
	0.0018	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D182□**
	0.0022	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D222□**
	0.0027	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D272□**
	0.0033	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D332□**
	0.0039	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D392□**
	0.0047	6.0	3.5	7.5	3.5±0.5	5.0	0.5	200	10,000	2,000	—	—	—	2,000	100F2D472□**
	0.0056	6.0	3.5	7.5	3.5±0.5	5.0	0.5	200	10,000	2,000	—	—	—	2,000	100F2D562□**
	0.0068	6.5	3.0	9.5	5.0±1.0	5.0	0.5	200	8,000	2,000	—	—	—	2,000	100F2D682□**
	0.0082	6.5	3.0	9.5	5.0±1.0	5.0	0.5	200	8,000	2,000	—	—	—	2,000	100F2D822□**
	0.01	7.0	4.0	10.0	5.0±1.0	5.0	0.5	200	5,000	2,000	—	—	—	2,000	100F2D103□**
	0.012	7.5	4.0	10.0	5.0±1.0	5.0	0.5	200	5,000	2,000	—	—	—	2,000	100F2D123□**
	0.015	7.5	4.0	10.0	5.0±1.0	5.0	0.5	200	5,000	2,000	—	—	—	2,000	100F2D153□**
	0.018	8.0	4.0	10.0	5.0±1.0	5.0	0.5	200	4,000	2,000	—	—	—	2,000	100F2D183□**
	0.022	8.0	4.0	12.0	5.0±1.0	5.0	0.5	200	4,000	2,000	—	—	—	2,000	100F2D223□**
	0.027	8.0	4.0	12.0	5.0±1.0	5.0	0.5	200	4,000	2,000	—	—	—	2,000	100F2D273□**
	0.033	8.5	4.0	12.5	5.0±1.0	5.0	0.5	200	4,000	2,000	—	—	—	2,000	100F2D333□**
	0.039	8.5	4.5	12.5	5.0±1.0	5.0	0.5	200	3,000	2,000	—	—	—	2,000	100F2D393□**
	0.047	9.0	4.5	12.5	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	100F2D473□**
0.056	9.0	5.5	13.0	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	100F2D563□**	
0.068	9.0	5.5	13.0	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	100F2D683□**	
0.082	9.5	6.0	13.0	7.5±1.5	5.0	0.5	200	2,000	1,000	—	—	—	1,000	100F2D823□**	
0.1	10.5	6.0	13.0	7.5±1.5	5.0	0.5	200	2,000	1,000	—	—	—	1,000	100F2D104□**	
0.12	10.5	6.0	15.0	7.5±1.5	5.0	0.6	200	2,000	—	—	—	—	—	100F2D124□**	
0.15	11.5	7.0	15.0	7.5±1.5	5.0	0.6	100	1,000	—	—	—	—	—	100F2D154□**	
0.18	12.0	7.0	15.5	7.5±1.5	5.0	0.6	100	1,000	—	—	—	—	—	100F2D184□**	
0.22	13.0	8.0	15.5	7.5±1.5	5.0	0.6	100	1,000	—	—	—	—	—	100F2D224□**	
200 VDC	0.00047	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D471□**
	0.00056	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D561□**
	0.00068	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D681□**
	0.00082	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D821□**
	0.001	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D102□**
	0.0012	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D122□**
	0.0015	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D152□**
	0.0018	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D182□**
	0.0022	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D222□**
	0.0027	6.5	3.5	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D272□**
	0.0033	6.5	3.5	9.5	3.5±1.5	5.0	0.5	200	10,000	2,000	—	—	—	2,000	200F2D332□**
	0.0039	6.5	3.5	9.5	5.0±1.0	5.0	0.5	200	8,000	2,000	—	—	—	2,000	200F2D392□**
	0.0047	7.0	3.5	9.5	5.0±1.0	5.0	0.5	200	8,000	2,000	—	—	—	2,000	200F2D472□**
	0.0056	7.0	4.0	9.5	5.0±1.0	5.0	0.5	200	5,000	2,000	—	—	—	2,000	200F2D562□**
	0.0068	7.5	4.0	10.0	5.0±1.0	5.0	0.5	200	5,000	2,000	—	—	—	2,000	200F2D682□**
	0.0082	7.0	4.0	12.0	5.0±1.0	5.0	0.5	200	5,000	2,000	—	—	—	2,000	200F2D822□**
	0.01	7.5	4.0	12.0	5.0±1.0	5.0	0.5	200	4,000	2,000	—	—	—	2,000	200F2D103□**
	0.012	8.0	4.0	12.0	5.0±1.0	5.0	0.5	200	4,000	1,000	—	—	—	1,000	200F2D123□**
	0.015	8.0	4.5	12.0	5.0±1.0	5.0	0.5	200	4,000	1,000	—	—	—	1,000	200F2D153□**
	0.018	8.5	4.5	12.5	5.0±1.0	5.0	0.5	200	4,000	1,000	—	—	—	1,000	200F2D183□**
	0.022	9.0	5.0	13.0	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	200F2D223□**
	0.027	9.5	5.5	13.0	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	200F2D273□**
	0.033	9.5	6.0	13.0	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	200F2D333□**
	0.039	10.0	6.0	15.0	7.5±1.5	5.0	0.5	200	3,000	750	—	—	—	750	200F2D393□**
	0.047	10.5	6.0	15.0	7.5±1.5	5.0	0.5	200	2,000	750	—	—	—	750	200F2D473□**
0.056	11.0	6.5	15.0	7.5±1.5	5.0	0.5	100	2,000	—	500	—	—	—	200F2D563□**	
0.068	11.5	7.0	15.0	7.5±1.5	5.0	0.6	100	2,000	—	500	—	—	—	200F2D683□**	
0.082	11.5	7.0	18.0	7.5±1.5	5.0	0.6	100	2,000	—	—	—	—	—	200F2D823□**	
0.1	12.0	7.5	18.0	7.5±1.5	5.0	0.6	100	1,000	—	—	—	—	—	200F2D104□**	
0.12	13.5	7.5	20.0	10.0±2.0	—	0.6	100	1,000	—	—	—	—	—	200F2D124□**	
0.15	14.0	8.0	20.0	10.0±2.0	—	0.6	100	800	—	—	—	—	—	200F2D154□**	
0.18	15.0	8.5	20.0	10.0±2.0	—	0.6	100	600	—	—	—	—	—	200F2D184□**	
0.22	16.0	10.0	20.0	10.0±2.0	—	0.6	100	600	—	—	—	—	—	200F2D224□**	