
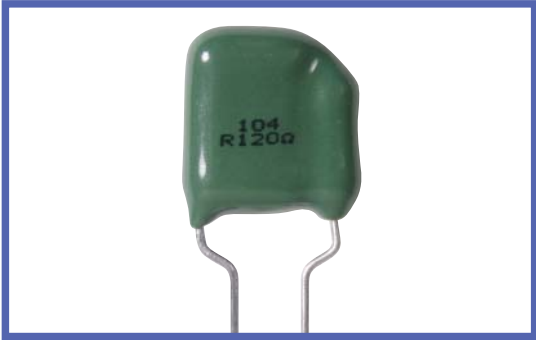


MCRA-DP SERIES

◆ FEATURES

- Suitable for absorbing surge voltage and protecting contact of relay and switch, etc.
- Coated with flame-retarant (UL94 V-0) epoxy resin.
- RoHS compliance.




◆ SPECIFICATIONS

Category temperture	-25°C~+85°C
Rated voltage (U _R)	125VAC, 250VAC
Capacitance tolerance	± 20%(M)
Resistance tolerance	± 10%(K)
Voltage proof	U _R ×230% 60s
Insulation resistance	3000MΩ min
Resistance standard	

◆ OUT LINE

(mm)

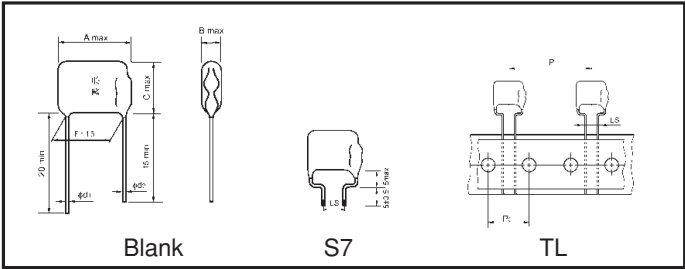

◆ PART NUMBER

MCRA M DP B
Rated Voltage Series Rated capacitance Resistance Tolerance Sub mark Suffix Spec. No.

◆ STANDARD SIZE

RATED VOLTAGE	cap(μF)	R (Ω)	Dimensions (mm)						Typical Packaging Quantity (pcs)						Part No.
									Long Lead type		Taping Ammo pack type - style				
			A	B	C	F±1.5	LS±0.5	d	Bag	Carton	TC	TX, TH	TL, TJ	TN	
125 VAC	0.033	47	14.0	6.5	16.0	8.5	5.0	0.7	200	3,000	–	–	500	–	125MCRA333047M DP**B0918
	0.033	120	14.5	6.5	16.0	8.5	5.0	0.7	200	3,000	–	–	500	–	125MCRA333120M DP**B0891
	0.1	47	15.5	6.5	16.0	10.0	5.0	0.7	200	3,000	–	–	500	–	125MCRA104047M DP**B0901
	0.1	120	15.5	7.0	16.0	10.0	5.0	0.7	200	3,000	–	–	500	–	125MCRA104120M DP**B0768
250 VAC	0.033	47	15.5	7.0	17.0	10.0	5.0	0.7	200	3,000	–	–	500	–	250MCRA333047M DP**B0853
	0.033	120	15.5	7.0	17.0	10.0	5.0	0.7	200	3,000	–	–	500	–	250MCRA333120M DP**B0915
	0.1	47	17.0	8.5	17.5	12.0	5.0	0.7	100	2,000	–	–	500	–	250MCRA104047M DP**B1139
	0.1	120	17.0	8.5	17.5	12.0	5.0	0.7	100	2,000	–	–	500	–	250MCRA104120M DP**B0850

** : Suffix

*The combination of C and R respond to custom design.