



VXR SERIES

105°C 7000 hours, Snap-in Terminal Type.

◆FEATURES

- Load Life : 105°C 7000hours.
- RoHS compliance.



◆SPECIFICATIONS

Items	Characteristics								
Category Temperature Range	-25~+105℃								
Rated Voltage Range	160~450V.DC								
Capacitance Tolerance	± 20%(20℃,120Hz)								
Leakage Current(MAX)	I= 3√CV (After 5 minutes application of rated voltage) I= (μA) V= (V) C= (μF) Leakage Current Rated Voltage Rated Capacitance								
Dissipation Factor(MAX) (tanδ)	<table border="1"><tr><td>(V) Rated Voltage</td><td>160~250</td><td>315~450</td></tr><tr><td>tanδ</td><td>0.15</td><td>0.20</td></tr></table> (20℃,120Hz)			(V) Rated Voltage	160~250	315~450	tanδ	0.15	0.20
(V) Rated Voltage	160~250	315~450							
tanδ	0.15	0.20							
Impedance Ratio(MAX)	<table border="1"><tr><td>(V) Rated Voltage</td><td>160~250</td><td>315~450</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>3</td><td>8</td></tr></table> (120Hz)			(V) Rated Voltage	160~250	315~450	Z(-25℃)/Z(20℃)	3	8
(V) Rated Voltage	160~250	315~450							
Z(-25℃)/Z(20℃)	3	8							
Endurance	After applying rated voltage with rated ripple current for 7000hrs at 105℃, the capacitors shall meet the following requirements. <table border="1"><tr><td>Capacitance Change</td><td>Within ± 20% of the initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 200% of the specified value.</td></tr><tr><td>Leakage Current</td><td>Not more than the specified value.</td></tr></table>			Capacitance Change	Within ± 20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within ± 20% of the initial value.								
Dissipation Factor	Not more than 200% of the specified value.								
Leakage Current	Not more than the specified value.								

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

(Hz) Frequency		60(50)	120	500	1k	10k≤
Coefficient	160~250WV	0.80	1.00	1.20	1.30	1.50
	315~450WV	0.80	1.00	1.20	1.25	1.40

◆PART NUMBER


VXR SN DxL
Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Terminal Code Case Size

◆Option

	Code
PET Sleeve without plate	EFC
PVC Sleeve without plate	OOE
PVC Sleeve with plate	Blank

◆DIMENSIONS

(mm)

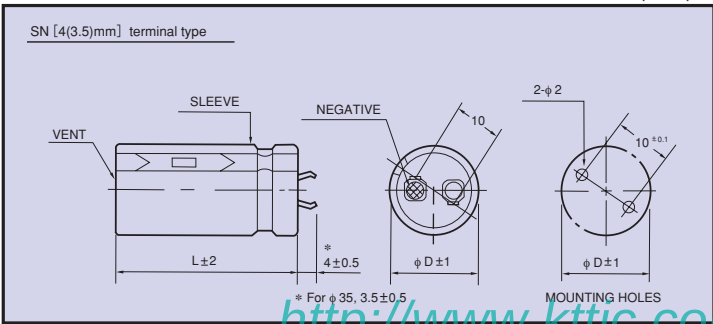



◆ STANDARD SIZE

Cap(μF) WV φ D	160				180			
	φ 22	φ 25	φ 30	φ 35	φ 22	φ 25	φ 30	φ 35
220					22×25 1.00			
270	22×25 1.10				22×25 1.10			
330	22×25 1.20				22×30 1.20	25×25 1.20		
390	22×30 1.30	25×25 1.30			22×30 1.30	25×25 1.30		
470	22×35 1.40	25×30 1.40			22×35 1.40	25×30 1.40	30×25 1.40	
560	22×40 1.50	25×30 1.50	30×25 1.50		22×40 1.50	25×35 1.50	30×25 1.50	
680	22×45 1.70	25×35 1.70	30×30 1.70		22×45 1.70	25×35 1.70	30×30 1.70	
820	22×50 2.00	25×40 2.00	30×30 2.00			25×40 2.00	30×35 2.00	35×30 2.00
1000		25×45 2.20	30×35 2.20	35×30 2.20		25×50 2.20	30×35 2.20	35×30 2.20
1200		25×50 2.30	30×40 2.30	35×35 2.30			30×40 2.30	35×35 2.30
1500			30×45 2.50	35×35 2.50			30×50 2.50	35×40 2.50
1800			30×50 2.70	35×40 2.70				35×45 2.70
2200				35×45 2.90				35×50 2.90

Cap(μF) WV φ D	200				250			
	φ 22	φ 25	φ 30	φ 35	φ 22	φ 25	φ 30	φ 35
180					22×25 0.90	25×25 0.90		
220	22×25 1.00				22×30 1.00	25×25 1.00		
270	22×30 1.10	25×25 1.10			22×35 1.10	25×30 1.10	30×25 1.10	
330	22×30 1.20	25×25 1.20			22×40 1.20	25×30 1.20	30×25 1.20	
390	22×35 1.30	25×30 1.30	30×25 1.30		22×45 1.30	25×35 1.30	30×30 1.30	
470	22×40 1.40	25×35 1.40	30×25 1.40		22×50 1.40	25×40 1.40	30×30 1.40	35×30 1.40
560	22×45 1.50	25×35 1.50	30×30 1.50			25×45 1.50	30×35 1.50	35×30 1.50
680	22×50 1.70	25×40 1.70	30×30 1.70			25×50 1.70	30×40 1.70	35×35 1.70
820		25×45 2.00	30×35 2.00	35×30 2.00			30×45 2.00	35×35 2.00
1000			30×40 2.20	35×35 2.20			30×50 2.20	35×40 2.20
1200			30×45 2.30	35×40 2.30				35×45 2.30
1500				35×50 2.50				

Cap(μF) WV φ D	315				350			
	φ 22	φ 25	φ 30	φ 35	φ 22	φ 25	φ 30	φ 35
82	22×25 0.64				22×25 0.64			
100	22×30 0.69				22×30 0.69	25×25 0.69		
120	22×30 0.75	25×25 0.75			22×35 0.75	25×30 0.75		
150	22×35 0.82	25×30 0.82	30×25 0.82		22×40 0.82	25×30 0.82	30×25 0.82	
180	22×40 0.90	25×30 0.90	30×25 0.90		22×45 0.90	25×35 0.90	30×30 0.90	
220	22×45 1.00	25×35 1.00	30×30 1.00		22×50 1.00	25×40 1.00	30×30 1.00	
270		25×40 1.10	30×35 1.10	35×30 1.10		25×45 1.10	30×35 1.10	35×30 1.10
330		25×50 1.20	30×40 1.20	35×30 1.20			30×40 1.20	35×35 1.20
390			30×40 1.30	35×35 1.30			30×45 1.30	35×35 1.30
470			30×45 1.40	35×40 1.40			30×50 1.40	35×40 1.40
560				35×45 1.50				35×50 1.50
680				35×50 1.70				

Cap(μF) WV φ D	400				450			
	φ 22	φ 25	φ 30	φ 35	φ 22	φ 25	φ 30	φ 35
39					22×25 0.37			
47					22×30 0.40			
56	22×25 0.51				22×35 0.47	25×25 0.47		
68	22×30 0.56	25×25 0.56			22×40 0.53	25×30 0.53		
82	22×30 0.64	25×25 0.64			22×45 0.56	25×35 0.56	30×25 0.56	
100	22×35 0.69	25×30 0.69			22×50 0.64	25×40 0.64	30×30 0.64	
120	22×40 0.75	25×30 0.75	30×25 0.75			25×45 0.72	30×30 0.72	
150	22×45 0.82	25×35 0.82	30×30 0.82			25×50 0.79	30×40 0.79	35×30 0.79
180	22×50 0.90	25×40 0.90	30×30 0.90	35×25 0.90			30×45 0.87	35×35 0.87
220		25×45 1.00	30×35 1.00	35×30 1.00			30×50 1.00	35×40 1.00
270			30×40 1.10	35×35 1.10				35×45 1.19
330			30×45 1.20	35×40 1.20				35×50 1.38
390				35×45 1.30				
470				35×50 1.40				

Case Size φ D×L(mm)

Ripple Current (A r.m.s./120Hz/105°C)